



Description

The Element architectural wall panel system is a horizontally or vertically applied metal panel. Its interlocking legs create a 3/4" or 1" reveal line and concealed clips improve strength and flatness. This durable system combines aesthetic appeal with the quality assurance of IMETCO products in an easy-to-install panel system that is ideal for architectural wall and rainscreen applications.

Element panels are factory-fabricated to IMETCO's legendary standard of quality, and backed by unparalleled service and support.

Design Characteristics

- Interlocking seams with concealed clips
- Install over solid substrate with underlayment or over hat sections
- Standard Panel Depth: 1-1/4"
- Includes a 3/4" or 1" reveal

Available Materials


- Aluminum: .040", .050", .063", .080"
- Galvanized: 20 & 22 gauge
- Stainless Steel: 20 & 22 gauge
- United Zinc: 0.8mm, 1.0mm *
- Copper: 16, 20 & 24 ounce

Testing

- AAMA 509.9
(when used in a Rainscreen assembly)
- ASTM E 283

Warranties

- Finish Warranty
- Watertightness Warranty available for IntelliScreen Systems

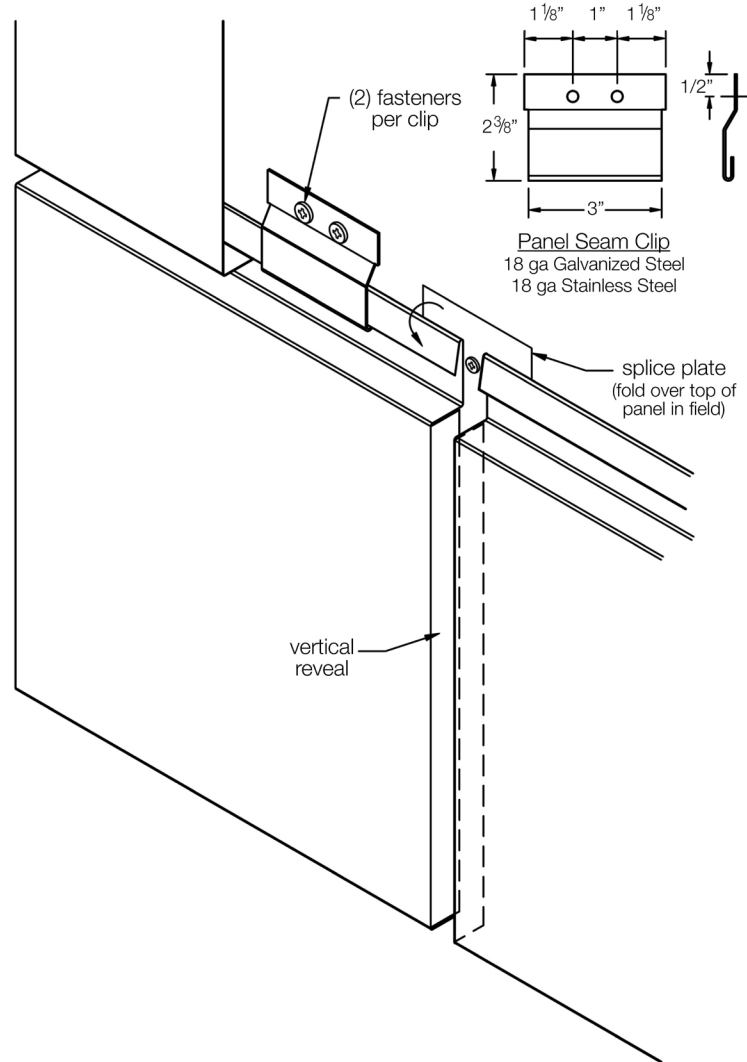

* 0.7mm United Zinc is available upon request. Please contact your IMETCO sales professional for information on lead time and minimum order quantity requirements.





Aluminum Panel Size Availability (Horizontal Applications)

Gauge	.040"	.050"	.063"	.080"
Maximum Height	16"	20"	24"	30"
Maximum Length	96"	96"	96"	96"


Aluminum Panel Size Availability (Vertical Applications)

Gauge	.040"	.050"	.063"	.080"
Maximum Height	72"	72"	72"	72"
Maximum Length	10"	14"	22"	24"

* For Galvanized Steel, Stainless Steel, United Zinc and Copper panel size availability, please contact your IMETCO rep.



Element Panel Orientation

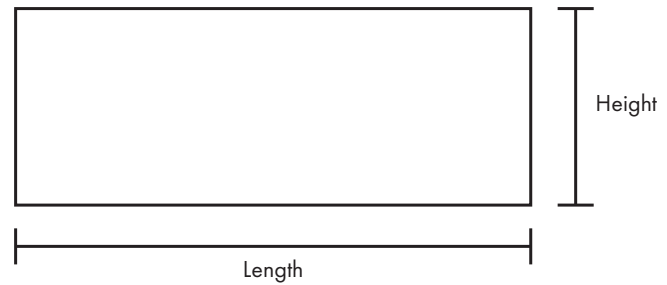

For specific application recommendations, please contact your local IMETCO representative.

For more information, scan the QR code to visit our Element homepage.



a subsidiary of Garland Industries, Inc.